

# TAŚMA LED 12V / SMD 5050 - 300 / IP65

## LED STRIPS 12V / SMD 5050 - 300 / IP65

# PREMIUM




### PRODUKTY UZUPEŁNIAJĄCE ADDITIONAL PRODUCTS

art.no: DIMMER 2.4G 4-ZONES ROTATING WHEEL RF

art.no: DIMMER 2.4G RECEIVER SINGLE COLOR



art.no: PS-MOD-50W12V4.17A

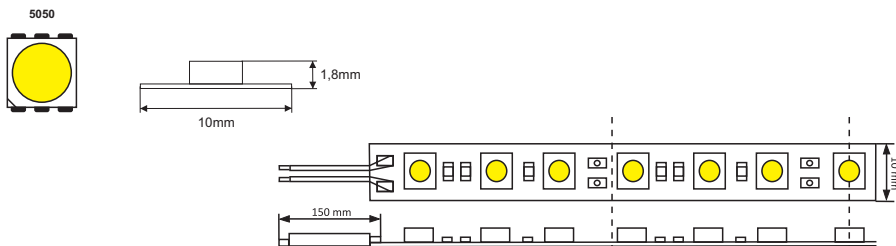

	LS5300WW 5050_WB_EX	LS5300NW 5050_WB_EX	LS5300NW 5050_WB_EX
	5908293906502	5908293907141	5908293906496
	65	65	65
	48W (9,6W/m)	48W (9,6W/m)	48W (9,6W/m)
	4A (0,8A/m)	4A (0,8A/m)	4A (0,8A/m)
	12V DC	12V DC	12V DC
	16lm/led	17lm/led	18lm/led
	2800-3000K	4000-4500K	6000-6500K
	5050	5050	5050
	300 (60led/m)	300 (60led/m)	300 (60led/m)
	120°	120°	120°
	5m	5m	5m
	10mm	10mm	10mm
	2m*	2m*	2m*
<b>PCB</b>	<b>Podwójne Double</b>	<b>Podwójne Double</b>	<b>Podwójne Double</b>
	30000h	30000h	30000h
	-10/+30	-10/+30	-10/+30

\*Odległość pomiędzy punktami zasilania na taśmie gwarantująca minimalne spadki napięcia i optymalne parametry świecenia

\*The distance between the power supply points of the LED strip which ensures minimum voltage drop and optimum lighting parameters is 2m

